




4" LED Downlight Directional Gimbal Retrofit

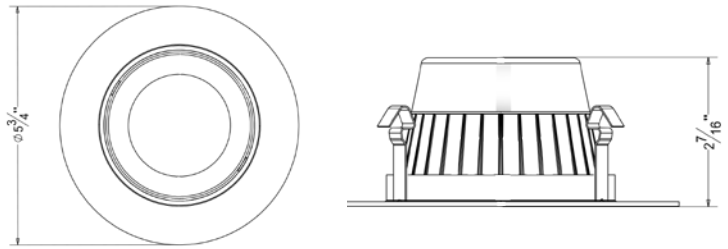

ORDER MATRIX | Example: BAL4001

A	B	C	D	E	F
A	Series				
BAL4001	4" LED Downlight Directional Gimbal				
B	Input Voltage				
	120V				
277	277V				
U	120-277V				
C	Dimmable				
	Non-Dimmable				
DM	Dimmable				
D	LED Available				
Cree	Cree				
Citizen	Citizen				
Epistar	Epistar				
Seoul	Seoul				
Osram	Osram				
E	Lumen Output				
600	600 Lumen				
800	800 Lumen				
F	Color Temperature				
27K	2700K				
40K	4000K				
60K	6000K				

Description

- All-in-one LED retrofit gimbal trim designed to use with Liteharbor 4 inch recessed residential downlight
- Allows for swivels 30° and rotates 355° adjustment
- Provide 50000 hours of life at 70% lumen maintenance
- No lead or mercury
- Trim shipped with a medium base socket adapter whip
- Available with dedicated Emergency Battery Back-up

LED Light Engine

- Cree true white® technology available
- CRI>80%
- Color temperature: 2700K-6000K
- Rated for 50000 hours at 70% lumen output
- No heat, mercury or UV

Driver

- Dedicated 120 volt driver
- Power factor >0.9
- Dimmable to 10% with most brand dimmers
- Rated for 50 to 60Hz at 120V/277V input
- Produces less than 20% THD

Listing & Warranty

- ETL listed to US and Canadian standards for wet locations
- 5-Year Limited Warranty