




6" Architectural Vertical Housing

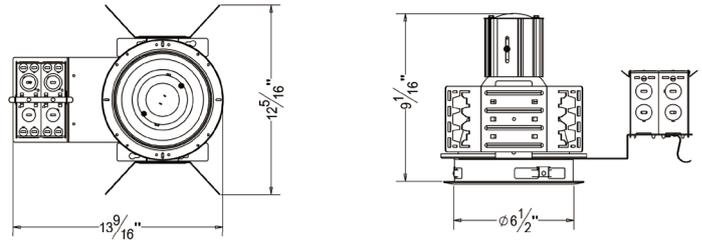

ORDER MATRIX | Example: A6-VA

| A | B | C | D | E | F |
|--------------|-----------------------------------|---|---|---|---|
| A | Series | | | | |
| A6-VA | 6" Architectural Vertical Housing | | | | |
| B | Input Voltage | | | | |
| | 120V | | | | |
| 277 | 277V | | | | |
| U | 120-277V | | | | |
| C | Lamp | | | | |
| P30 | PAR30 | | | | |
| P38 | PAR38 | | | | |
| A19 | A19 | | | | |
| A21 | A21 | | | | |
| D | Wattage | | | | |
| L18 | 18W | | | | |
| L24 | 24W | | | | |
| L12 | 12W | | | | |
| L17 | 17W | | | | |
| E | Color Temperature | | | | |
| 28K | 2800K | | | | |
| 35K | 3500K | | | | |
| 50K | 5000K | | | | |
| 65K | 6500K | | | | |
| F | Options | | | | |
| C | C-channel Bar Hanger | | | | |
| F | Flat Bar Hanger | | | | |
| H | Wood Joist Bar Hanger | | | | |

Mounting

- Constructed from 16-gauge steel, die-formed construction for max heat dissipation and rust protection
- Precision tooled springs secure trim to mounting frame for effortless and tool-less installation
- Compatible with C-channel, flat bar wood joist bar hanger and EMT.
- Fully assembled for ease of installation
- Non-IC housing require a minimum clearance of 3" around from thermal insulation and 1/2" from combustible material from above the fixture

Junction Box

- Pre-wired junction box provided with 1/2" and 3/4" knockouts
- Provided with removable access plates
- Knockouts equipped with pry out slots
- All leads are #18AWG wire, the ground wire connected to the bottom and quick connectors are supplied on all leads
- Through branch circuit wiring(4 in, 4 out)

Socket Cup

- Adjusts vertically for optimum light performance
- Die-cast fin construction for heat dissipation
- Unitized optics guarantees proper trim to housing installation
- Tool-less installation adjustability from either outside the housing or inside the housing

Reflector

- High quality reflector with 1.2mm thickness available finishes and types in multiple architectural finishes and types.
- Optional painted white flange is available
- Single position optics eliminate possibility of specified lamp being installed in incorrect position

Thermal Protector

- Meet ETL requirements
- Standard thermal protection device guards against improper installation, over lamping and misuse of insulation material
- External thermal device located on the junction box wrap

Socket

- E26 medium base

Lamp

- LED PAR30 18W max.
- LED PAR38 24W max.
- LED A19 12W max.
- LED A21 17W max.
- CRI>80%
- PF>0.9
- Color Temperature: 2800K-6500K

Listing

- ETL listed for damp location W/Feed through



RV6002

6 inch Vertical Reflector
Self Flanged/White Ring



RC602

6 inch Vertical Reflector with
Regressed Lens
Self Flanged/White Ring



RC603

6 inch Vertical Baffle with
Regressed Lens
Self Flanged/White Ring



RC608

6 inch Vertical Cross Blade
White Ring



RV612

6 inch Vertical Reflector with
Baffle
White Ring



RC166

6 inch Vertical Reflector with
Drop Glass
Self Flanged