


# XMI201 XML201 LED Exit & Emergency Light

|                  |  |                    |            |
|------------------|--|--------------------|------------|
| <b>Catalog #</b> |  | <b>Prepared by</b> | LiteHarbor |
| <b>Project</b>   |  | <b>Date</b>        |            |
| <b>Notes</b>     |  |                    |            |

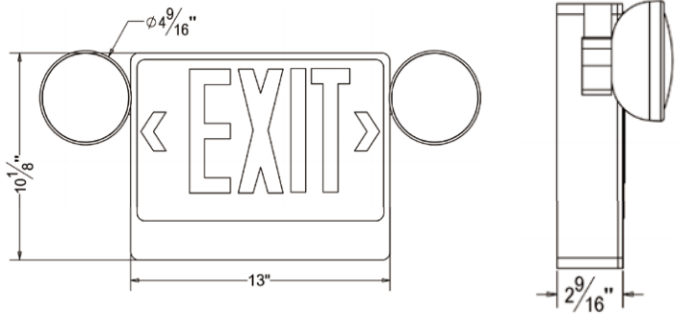

|                        |          |          |          |          |          |          |
|------------------------|----------|----------|----------|----------|----------|----------|
| <b>A</b>               | <b>B</b> | <b>C</b> | <b>D</b> | <b>E</b> | <b>F</b> | <b>G</b> |
| <b>H</b>               |          |          |          |          |          |          |
| Item No.:XMI201 XML201 |          |          |          |          |          |          |

## Description

- 1) Injection-molded thermoplastic ABS housing
- 2) AC-Only or self-powered models.
- 3) 120V/347V AC operation.
- 4) Long-life, energy-saving LED technology.
- 5) Power-on LED indicator Light and push-to-test switch.
- 6) Comes standard with two pictogram films per face,  
for direction selection
- 7) Low volt battery disconnection-preventing deep  
discharge damage to the battery.
- 8) Universal canopy available.
- 9) Universal knockout chevrons.
- 10) Innovative, snap-together design allows for fast installation
- 11) UL listed.
- 12) Warranty-2 years limited warranty.

## Housing Colour

WH / BK

## Letter Colour

Green / Red

## Mounting

Universal (wall, side or ceiling mounting)

Key hole slots are stamped into the backplate

|               |                 |
|---------------|-----------------|
|               | <b>A</b> Series |
| XMI201 XML201 | Exit Combo      |

|  |               |
|--|---------------|
|  | <b>B</b> Sign |
|  | Exit Sign     |
|  | R Running     |

|     |                        |
|-----|------------------------|
|     | <b>C</b> Input Voltage |
|     | 120V                   |
| 347 | 347V                   |

|    |                    |
|----|--------------------|
|    | <b>D</b> Face Q'ty |
| SF | Single Face        |
| DF | Double Face        |

|    |                         |
|----|-------------------------|
|    | <b>E</b> Battery Backup |
|    | Battery Backup          |
| AC | AC Only                 |

EXIT & EMERGENCY LIGHT



**Liteharbor Lighting Technology Co., Ltd.**  
New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675  
FAX: +86-757-8180 8685  
E-mail: info@liteharbor.com

Website: www.liteharbor.com  
Specifications subject to change w/o notice  
Revision: Jan. 2015

### Lamps

LED mounted on print circuit board (for exit sign)  
2X6V 6 watt T15 wedge base lamps for emergency mode

| F  | Housing Color |
|----|---------------|
| BK | Black         |
| WH | White         |

### Battery

Lead-Calcium battery (6v 4.5Ah)  
The sign is designed with a maintenance free  
Self-Powered model delivers standard two hours of  
back-up lighting  
Recharge time of the battery is twenty-four (24) hours.

| G  | Letter Color |
|----|--------------|
| RD | Red          |
| GN | Green        |

### Warranty

2 years limited warranty.

| H   | Arrow Direction |
|-----|-----------------|
|     | No indicators   |
| LA  | Left indicator  |
| RA  | Right indicator |
| UA  | Up indicator    |
| DA  | Down indicator  |
| URA | 45 ° up right   |
| DRA | 45 ° down right |
| ULA | 45 ° up left    |
| DLA | 45 ° down left  |



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015